



Inspire

Technical Data Sheet

Product Information

Dimensions:

Height up to 4000mm
Track Width 85mm
Track Height 23mm

Fire Ratings:

FR30/0

Acoustics:

Up to 44dB (Rw)

Structure:

BS5234; BS6180; BS6399

Joints:

Top Hat Trims

Corners:

Aluminium Corner

Deflection Head:

±12.5mm

Door Options:

Timber Door
Glazed Door
Stile Door
GDS Door

Profiles & Door Frame:

Aluminium

Ironmongery:

A wide range of ironmongery can be supplied with Inspire

Glass Type:

Toughened - Laminated

Glass Thickness:

6-10mm

Board Thickness:



12.5mm

Options:

Blinds
Manifestations
Graphics
Switch Glass

Finishes:

Polyester Powder Coat
Satin Anodised Aluminium
Special Anodised Finish

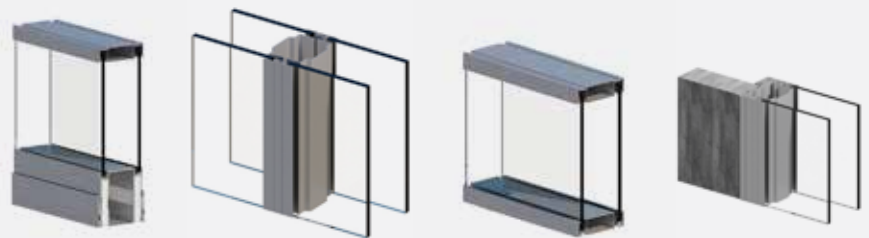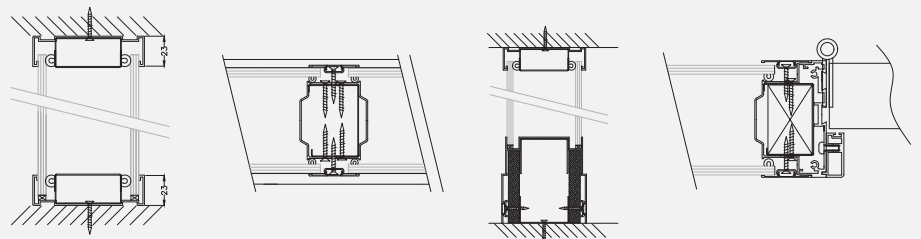

Inspire is our premier 75mm versatile relocatable partitioning system for on-site glazing. It is designed to be simple and quickly demounted and re-installed, ensuring minimal site disruption to any relocation.

With its smooth detailing and clever performance, Inspire creates both contemporary and vibrant schemes.

British Standards

- Sound Measurement BS EN ISO 140
- Sound Rating BS EN ISO 717
- Structural Stability BS5234; BS6180; BS6399



Inspire is designed and manufactured by Apton Partitioning Limited in the UK